

2-POST LIFTS
Electrohydraulic



 **Ravaglioli**

RAV
KPH350.40
KPH350.45

**Electrohydraulic
2-post lift without base,
with asymmetric arms
and symmetric posts
that enable an easy
access to the pick-up
points of the vehicle.**



- Shut-off bar to prevent damage caused by lifting high vehicles.
- Two pistons for intensive use designed to minimise down-time, by requiring little maintenance.
- Mechanical safety latch with automatic engagement ensuring maximum safety when lift is in standing position.
- Manual release by lever.



Arm safety locking with automatic engagement and automatic release when the arm reaches the floor.

Capacity



4

KPH350.40
Recommended
for lifting cars and
pickups.



4.5

KPH350.45
Recommended for
lifting vans.

Scope of delivery:



65 mm
spacers.

2


support brackets
for spacers.




Powder coating for
a longer lifetime.

Technical Data

Model KPH350.40

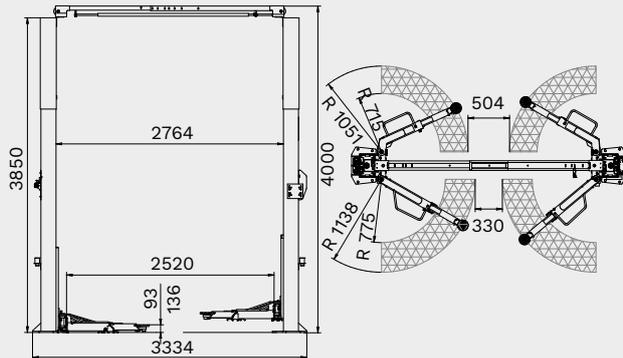

Model KPH350.45

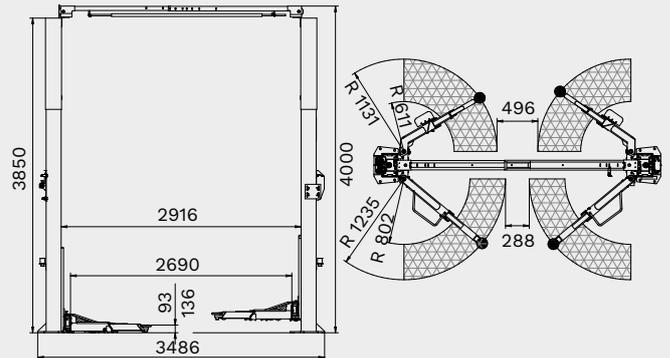

| KPH350.40 | |
|------------|------------|
| Item no. | Voltage |
| KPH-40ECGA | 400/50/3ph |
| KPH-40NCGA | 230/50/1ph |

| KPH350.45 | |
|------------|------------|
| Item no. | Voltage |
| KPH-45ECGA | 400/50/3ph |

| | KPH350.40 | KPH350.45 |
|----------------------------|---------------|---------------|
| Capacity | 4,000 kg | 4,500 kg |
| Max. lifting height | 1,946 mm | 1,946 mm |
| Lifting time | 54 s | 54 s |
| Min. pad height | 93 mm | 93 mm |
| Max. pad height | 136 mm | 136 mm |
| Column distance (internal) | 2,764 mm | 2,916 mm |
| Drive-through width | 2,520 mm | 2,690 mm |
| Max. usable height | 3,850 mm | 3,850 mm |
| Surface coating | powder coated | powder coated |
| Arm layout | asymmetrical | asymmetrical |
| Telescopic front arms | 2 stages | 3 stages (S) |
| Telescopic rear arms | 2 stages | 2 stages (L) |
| Min. front arm length | 715 mm | 611 mm |
| Max. front arm length | 1,051 mm | 1,131 mm |
| Min. rear arm length | 775 mm | 802 mm |
| Max. rear arm length | 1,138 mm | 1,235 mm |
| Width | 3,334 mm | 3,486 mm |
| Height | 4,000 mm | 4,000 mm |
| Weight | 725 kg | 750 kg |

* S = short; L = long



RAV Italy

Ravaglioli S.p.A.

Via Primo Maggio 3
Pontecchio Marconi
40037 Sasso Marconi BO

☎ +39.051.6781511
📠 +39.051.846349
✉ rav@ravaglioli.com

RAV France

RAV France SARL

4, Rue Longue Raie
ZAC de la Tremblaie
91220 Le Plessis Pâté

☎ +331.60.86.88.16
📠 +331.60.86.82.04
✉ rav@ravfrance.fr

RAV Germany

BlitzRotary GmbH

Hüfänger Straße 55
78199 Bräunlingen
Germany

☎ +49.771.9233.0
📠 +49.771.9233.99
✉ ravid@ravaglioli.com

RAV UK

Vehicle Service Group UK Ltd

3 Fourth Avenue,
Bluebridge Industrial Estate
Halstead, Essex, CO9 2SY, UK

☎ +44.1787.477711
📠 +44.1787.477720
✉ rav@ravaglioli.com

DRD40U (01)

Technical data and composition presented in this catalogue may vary.
Pictures reproduced are only indicative.

Member of VSG - Vehicle Service Group
a  company

